

DC MAGNETIC FIELDS

MAGNETIC FIELD KITS FOR DC MAGNETIC FIELD TESTING



FOR TESTS ACCORDING TO ...

- > ISO 11452-8
- > VW 81000

DC MAGNETIC FIELDS


A recent trend, now supported in ISO 11452-8 is to perform immunity tests using DC magnetic fields. As DC magnetic fields can not be measured in the traditional way, a Hall sensor must be used for verification. Precise positioning is extremely critical for accurate measurements, so a low-ferrous-content tripod assembly is provided for the sensor. No single coil can provide all four test levels, so these kits are provided with two coils each.

Available in Helmholtz and radiated loop variants.

HIGHLIGHTS

- > **Guaranteed field strength 30 to 4000 A/m**
- > **Fulfills ISO 11452-8 Level I - IV**
- > **Includes Hall sensor, stand and two coils**
- > **For DC magnetic fields according to ISO 11452-8**
- > **Fully integrated in autowave.control for ease-of-use**

APPLICATION AREAS



AUTOMOTIVE

TECHNICAL DETAILS

BENEFITS


Add to your AMP 200N2-based system and your supported current measurement device, this kit includes everything you need to generate DC magnetic fields from 30 to 4000 A/m with guaranteed field strength, of course fully integrated in our autowave.control for just the right combination of a large pallet of features you need, made easy to use.

TEST SETUP

TESTS FOR DC MAGNETIC FIELDS:

First, the calibration must be performed using the probe where autowave.control will store the current values needed to achieve the desired field strength at each step.

Then, the probe is removed from the setup and the test is performed using the substitution mode concept.

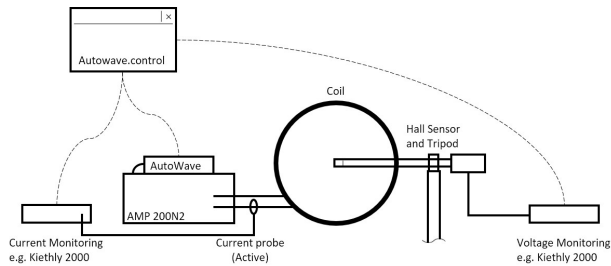

DC MAGNETIC FIELD KITS

TECHNICAL SPECIFICATIONS

Field Strength	30 A/m to 4000 A/m (DC)
Available Models	Radiating Loop (Art. No. 1004304) Helmholtz (Art. No. 1004303)

GENERAL DATA

ENVIRONMENT

Temperature	10° C to 40° C
Rel. humidity	Max. 85 %, non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1,060 mbar)

INCLUDED ACCESSORIES

General	Adapter for holding the Hall sensor on the mast Mast for holding the Hall sensor Mast base Hall sensor Zero-gauss chamber for zeroing the hall sensor. MN-DC HField matching network
Helmholtz	HHS 5206-16 HHS 5206-132
Radiating Loop	RL 120 FESP 5133-1330

COMPETENCE WHEREVER YOU ARE



CONTACT EM TEST DIRECTLY

Switzerland

AMETEK CTS GmbH › Sternenhofstraße 15 › 4153 Reinach › Switzerland
Phone +41 (0)61 204 41 11 › Fax +41 (0)61 204 41 00
Internet: www.ametek-cts.com › E-mail: sales.conducted.cts@ametek.com

Germany

AMETEK CTS Europe GmbH › Customer Care Center EMEA › Lünener Straße 211
› 59174 Kamen › Germany
Phone +49 (0) 2307 26070-0 › Fax +49 (0) 2307 17050
Internet: www.ametek-cts.com › E-mail: info.cts.de@ametek.com

Poland

AMETEK CTS Europe GmbH › Biuro w Polsce › ul. Twarda 44 › 00-831 Warsaw › Poland
Phone +48 (0) 518 643 12
Internet: www.ametek-cts.com › E-mail: Infopolska.cts@ametek.com

USA / Canada

AMETEK CTS US › 52 Mayfield Ave › Edison › NJ 08837 › USA
Phone +1 732 417 0501
Internet: www.ametek-cts.com › E-mail: usasales.cts@ametek.com

P.R. China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd. › Beijing Branch › Western Section, 2nd floor › Jing Dong Fang Building (B10) › Chaoyang District › Beijing, China, 100015
Phone +86 10 8526 2111 › Fax +86 (0)10 82 67 62 38
Internet: www.ametek-cts.com › E-mail: chinasales@ametek.com

Republic of Korea

EM TEST Korea Limited › #405 › WooYeon Plaza › #986-8 › YoungDeok-dong › Giheung-gu › Yongin-si › Gyeonggi-do › Korea
Phone +82 (31) 216 8616 › Fax +82 (31) 216 8616
Internet: www.emtest.co.kr › E-mail: sales@emtest.co.kr

Singapore

AMETEK Singapore Pte. Ltd › No. 43 Changi South Avenue 2 › 04-01 Singapore 48164
Internet: www.ametek-cts.com › E-mail: singaporesales.cts@ametek.com

Great Britain

AMETEK GB › 5 Ashville Way › Molly Millars Lane › Wokingham › Berkshire RG41 2 PL › Great Britain
Phone +44 845 074 0660
Internet: www.ametek-cts.com

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.